


AGREE Test Chamber

(Temperature, humidity, vibration)




Mobile phone scan
More product information

Energy Conservation

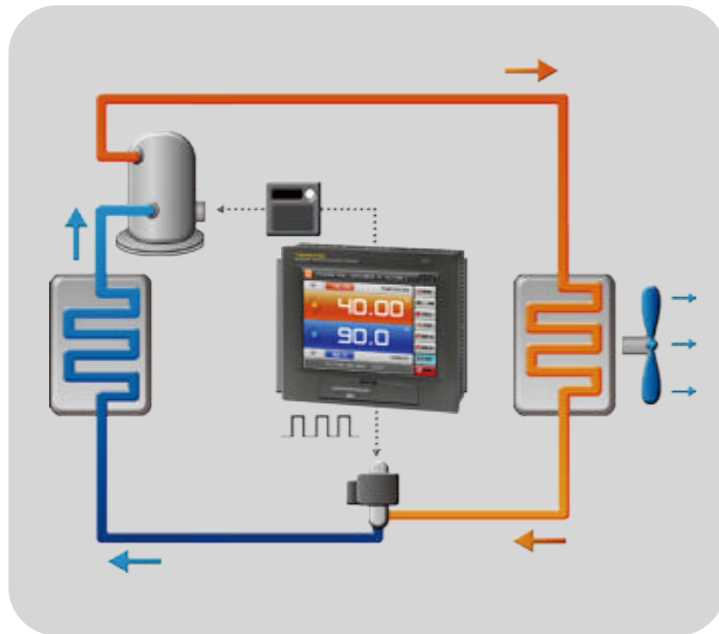

Remote network system

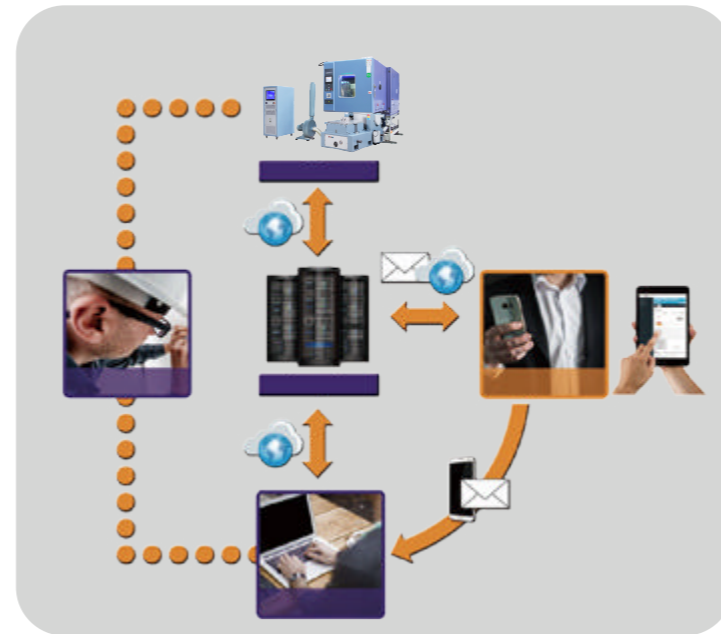

Circuit System



• Specifications

Model		SM-MVH-500-CC	SM-MVH-1000-CC	SM-MVH-1700-CC	SM-MVH-3400-CC
Temperature	Temperature control range	-70℃~180℃ (A:0℃~180℃;B: -20℃~180℃; C: -40℃~180℃;D:-70℃~180℃)			
	Temperature fluctuation	±0.5℃			
	Cooling rate	180.0℃~-70.0℃ Within 100 mins(1.0~3.0℃/min) (Can choose linear or nonlinear: 1.0℃, 3.0℃, 5.0℃, 10.0℃, 15.0℃, 20.0℃/min)			
	Heating rate	-70.0℃~180.0℃ Within 60 mins(3.0~5.0℃/min) (Can choose linear or nonlinear: 1.0℃, 3.0℃, 5.0℃, 10.0℃, 15.0℃, 20.0℃/min)			
	Temperature uniformity	±1.5℃ (-40.0℃~100.0℃) ±2.0℃ (100.1℃~180.0℃or-40.0℃~-70.0℃)			
Humidity	Humidity control range	10.0%RH~98.0%RH(60℃ corresponds to 11%RH)			
	Humidity fluctuation	±1.0% RH			
	Humidity uniformity	±2.0%RH			
Material / components	Internal material	Stainless steel(SUS304)			
	External material	Cold rolled steel sheet / powder spraying			
	Heat insulating material	100mm thickness polyurethane plate+10mm thickness mineral wool			
	Fan	Centrifugal blower			
	Compressor	France Tecumseh, Germany Bock, Germany Bitzer			
	Condenser	Air cooled,Water cooled			
	Refrigerant	R404A, R23, R508			
	Evaporator	Fin - and - Tube Heat Exchanger			
	Heater	Nickel chromium alloy heating wire			
Humidifier	Steam humidifier				
Size	Inner size(mm) W*H*D	800*800*800	1000*1000*1000	1200*1200*1200	1500*1500*1500
	Volume (L)	500L	1000L	1700L	3400L
Operating ambient temperature		+5 ~ 35℃			
Power supply		380V AC 50/60Hz			
Controller		Standard: South Korea TEMI-1500 Optional: South Korea TEMI-2500,South Korea TEMI-2700			

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong
TEL: +86+769-81182799
FAX: +86+769-82987199
E-mail: info@sanwood.cc
www.sanwood.cc
www.climatic-chambers.com



Mobile phone scan
can visit our official website