


Altitude Temperature Chamber




Mobile phone scan
More product information

SANWOOD
Environmental Test Chambers

Energy Conservation

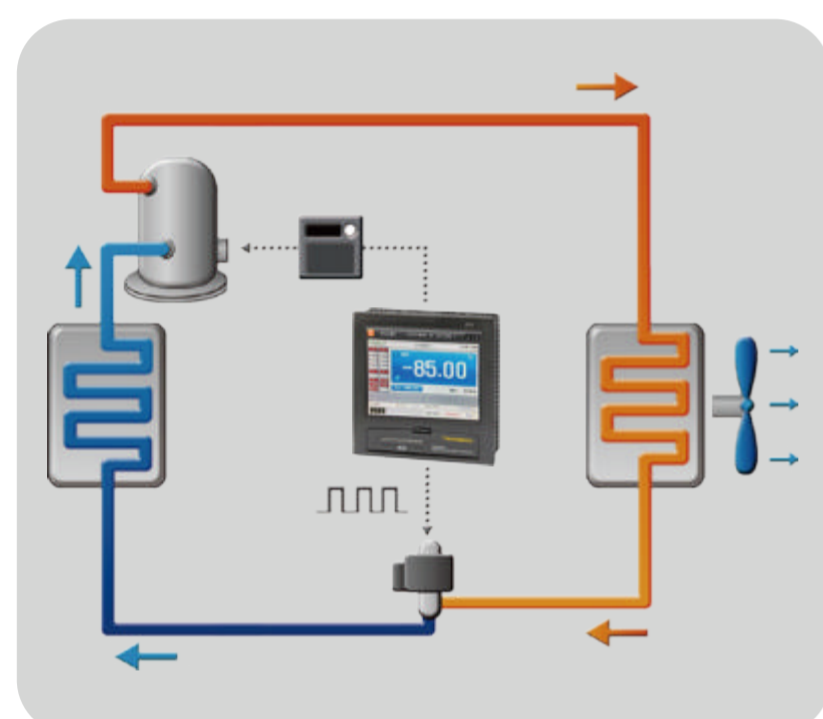

Remote network system

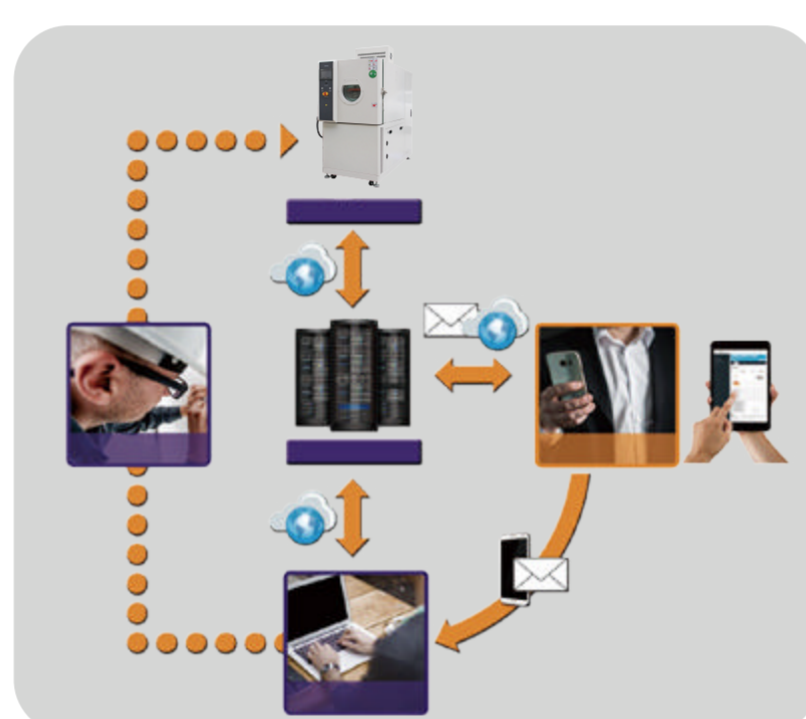

Circuit System



SANWOOD
Environmental Test Chambers



Specifications

Model		SM-VTH-250-CC	SM-VTH-500-CC	SM-VTH-1000-CC	SM-VTH-2000-CC
Temperature	Temperature control range	-70℃~180℃	(-70℃~180℃;A:0℃~180℃;B: -20℃~180℃; C: -40℃~180℃;D:-70℃~180℃)		
	Temperature fluctuation	±0.5℃			
	Cooling rate	180.0℃~-70.0℃ Within 120mins (1.0~2.0℃/min)			
	Heating rate	-70.0℃~180.0℃ Within 100mins (2.0~3.0℃/min)			
	Temperature uniformity	±1.5℃ (-40.0℃~100.0℃) ±2.0℃ (100.1℃~180.0℃or-40.0℃~-70.0℃)			
Pressure	Pressure range	Normal pressure~0.5kpa (500pa)			
	Pressure error	±2kpa (>40kpa),±5%(2kpa~40kpa),±0.1kpa(<2kpa)			
	Depressurization time	Normal pressure~1kpa, about 30 mins:			
	Pressure recovery time	<10kpa/min			
Humidity	Humidity control range	20.0%RH~98.0%RH(work under atmospheric humidity)			
	Humidity fluctuation	±2.0% RH			
	Humidity uniformity	±5.0% RH			
Material / components	Internal material	Adopt 2mm thickness stainless steel plate (SUS304)			
	External material	Adopt 10mm thickness cold rolled steel plate fully welded / powder sprayed			
	Heat insulating material	100mm thickness polyurethane plate + 10mm thickness mineral wool			
	Fan	Centrifugal blower			
	Compressor	France Tecumseh, Germany Bock, Germany Bitzer			
	Condenser	Air cooling, water cooling			
	Refrigerant	R404A, R23, R508			
	Evaporator	Fin - and - Tube Heat Exchanger			
Heater	Nickel chromium alloy heating wire				
Humidifier	Steam humidifier				
Size	Inner size(mm)W*H*D	550*600*700	700*800*900	1000*1000*1000	1400*1200*1200
	Outer size(mm)W*H*D	2000*1060*1900	2500*1260*2050	2720*1460*2130	3150*1650*2050
	Volume (L)	250L	500L	1000L	2000L
Operating ambient temperature		+5 ~ 35℃			
Safety		Adjustable over temperature protection, heater dry burning over temperature protection, humidifier dry burning, over temperature protection, automatic stop operation when troubles occur. Leakage protection function cuts off main power supply			
Power supply		380V AC 50/60Hz			
Controller		SANWOOD SH5600:Equipped with RS232 port; (7.0 inch controller)USB data export			

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong

TEL: +86+769-81182799

FAX: +86+769-82987199

E-mail: info@sanwood.cc

www.sanwood.cc

www.climatic-chambers.com



Mobile phone scan
can visit our official website