

Walk in Temperature (& Humidity) Chamber







Mobile phone scan More product information



Energy Conservation

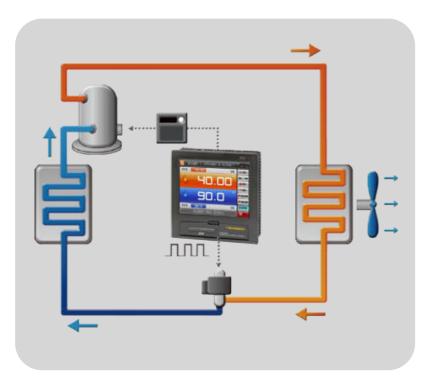

Remote network system

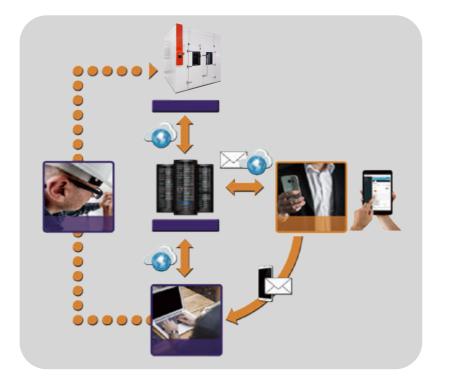

Circuit System



SANIJOOD® environmental test chambers



• Specifications

Model		SMC-080-CC-WT	SMC-120-CC-WT	SMC-160-CC-WT	SMC-250-CC-WT	SMC-340-CC-WT	SMC-400-CC-WT	
Temperature	Temperature control range	-65℃~80℃(+15℃)(A:0℃~80℃;B:-20℃~80℃;C:-40℃~80℃;D:-65℃~80℃)						
	Temperature fluctuation	±0.5℃						
	Cooling rate	80.0℃~-65.0℃ Within 110 mins 1.0~2.0℃/min						
	Heating rate	-65.0℃~80.0℃ Within 70 mins 2.0~5.0℃/min						
	Temperature uniformity	±2.0℃ (-40.0℃~80.0℃)						
		±2.5℃ (-40.0℃~-65.0℃)						
Humidity	Humidity control range	20.0%RH~95.0%RH						
	Humidity fluctuation	±1.5% RH						
	Hum idity uniform ity	±3.0%RH						
Material / components	Internal material	Stainless steel(SUS304)						
	External material	Cold rolled steel sheet / powder spraying						
	Heat insulating material	100mm thickness polyurethane plate \pm 10mm thickness mineral wool						
	Fan	SAN MOD [®] entrifugal blower						
	Compressor	Environmental Segui-closed, Germany Bock, Germany Bitzer						
	Condenser	Water-cooled						
	Refrigerant	R404A、R23、R508						
	Evaporator	Fin - and - Tube Heat Exchanger						
	Heater	Nickel chromium alloy heating wire						
	Humidifier	Steam humidifier						
Size	Interior size(mm)	1970*2100*1970	3020*2100*1970	4070*2100*1970	3020*2100*4070	4070*2100*4070	5120*2100*4070	
	Outer size(mm)	2170*2350*3500	3220*2350*3500	4270*2350*3500	4650*2350*4270	5720*2350*4270	5320*2350*6150	
	Volume (m ³)	8.0m³	12.0m³	16.0m³	25.0m³	34.0m³	40.0m ³	
Operating ambient temperature		+5 ~ 35 ℃						
Power supply		380VAC 50/60Hz	380VAC 50/60Hz	380V AC 50/60Hz	380V AC 50/60Hz	380V AC 50/60Hz	380V AC 50/60Hz	
	Controller		Standard: South Korea TEMI-1500 Optional: South Korea TEMI-2500,South Korea TEMI-2700					

Sanwood (HK) Industrial Corporation., limited Guangdong Sanwood Technology Corporation., limited

9 ADD: No.88, Songchang Road, Songbotang, Changping, Dongguan, Guangdong TEL: +86+769-81182799

FAX: +86+769-82987199

- E-mail: info@sanwood.cc \succ
- www.sanwood.cc www.climatic-chambers.com



Mobile phone scan can visit our official website